



# LBP MECHANICAL EDGE-OF-DOCK LEVELER



Dynamic Capacities  
20000; 250000; 30000 and 35000 lb.  
66" 72" 78", and 84" Deck Widths  
96" 102" 108" and 114" Overall Width



Formed Steel  
Gussets & Rib  
Reinforcement



Pushover Bar



Barlift



Bump Block &  
Molded Cord  
Rubber



Torsion Spring

## Valuable, Affordable and Dependable each LBP Mechanical Edge-of-Dock Leveler:

Offering a range of lengths, widths, and dynamic capacities, the Edge-of-Dock Leveler combines rugged durability with a competitive price. Edge-of-Dock Levelers provide an operating range of 5" above and 5" below dock, with a minimum lip projection of 12 3/4" and an overall span of 27 3/4". Broad centerplate and lip are constructed of 55,000 lb. minimum yield steel tread plate. Grease fittings on continuous lip hinge are standard with each unit.


## STANDARD FEATURES

- Centerplate and lip are constructed of 55,000 lb. Minimum Yield Steel Tread Plate.
- Formed, plate steel Bump Blocks and steel faced molded cord Rubber Bumpers protect dock face and Leveler from truck damage.
- Continuous Hinge Design with Grease Fittings included as standard with each unit.
- Torsion Spring Design allows simple, precise adjustment.
- Steel Rivets located at either end of the centerplate hinge provide easy, forklift installation.
- Leveler raises and extends smoothly onto truck bed with use of convenient Bar Handle.
- Unit is easily recycled with truck in position and automatically returns to stored position upon truck departure.
- Stronger Rib reinforcement underneath the centerplate.
- Flat Models available for pallet jack operation. Torsion Spring. Pushover Bar Bump.

# SPECIFICATION

## Mechanical Edge-of-Dock Leveler (inch)

Model		EOD20-BL66 EOD25-BL66 EOD30-BL66	EOD20-LBP72 EOD25-LBP72 EOD30-LBP72	EOD20-LBP78 EOD25-LBP78 EOD30-LBP78	EOD20-LBP84 EOD25-LBP84 EOD30-LBP84
Capacity		20000/25000/30000lbs	20000/25000/30000lbs	20000/25000/30000lbs	20000/25000/30000lbs
Lip length	A	15"	15"	15"	15"
Span	B	27 3/4"	27 3/4"	27 3/4"	27 3/4"
Deck width	C	66"	72"	78"	84"
Overall width	D	96"	102"	108"	114"
Travel	Up	5"	5"	5"	5"
	Down	5"	5"	5"	5"

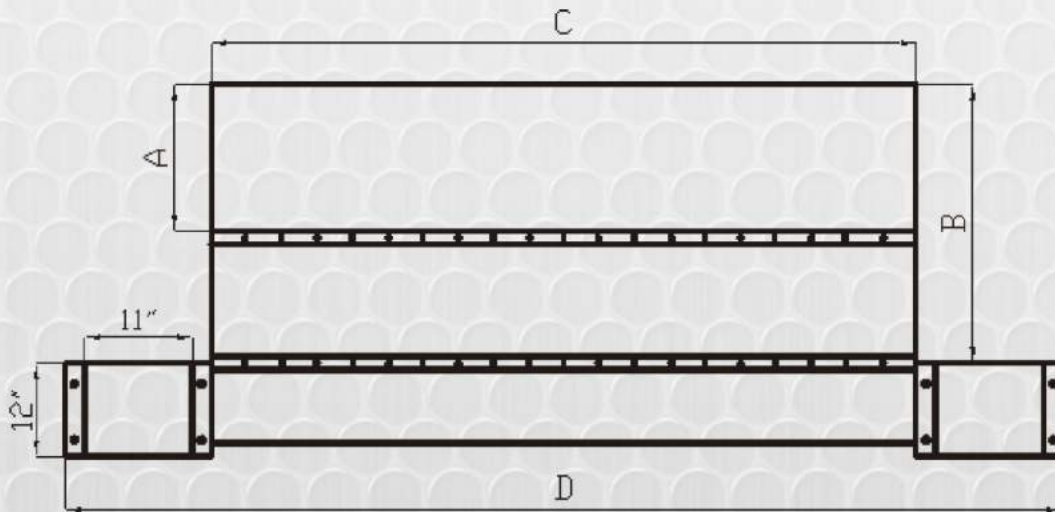

### SIMPLE OPERATION:

- 1. Lift the bar up from the stored position. The bar will halt angled towards the truck. Then pull the bar handle back and down towards you. The bar lift will automatically lock into position.**
- 2. Pull the bar up and forward.**
- 3. Lip automatically rides forward onto truck bed**
- 4. To prevent damage to the bar, return it to the stored position.**



www.loadingbaypro.com  
info@loadingbaypro.com  
Ph: 954 3261111

Distributed by:

